

ESSENTIAL LED OUTDOOR LIGHTING


WLP-A20-1400-4B | WLP-A30-2700-4B | WLP-A70-5400-4B WLP-A100-7000-4B | Adjustable Wall Pack




fEATURES


- → Up to 75% energy savings compared to incandescent
- → Die-cast aluminum housing with hinged front frame for durability
- → Fully gasketed glass lens protects the LEDs from water and bugs
- → Superior thermal management
- → Contemporary design and 50,000 hour lifetime makes for an ideal replacement of traditional fixtures
- → Full cut-off design is nighttime friendly.
- → IP65 rated, suitable for Wet Locations
- → DLC, ETL, FCC, RoHS certified









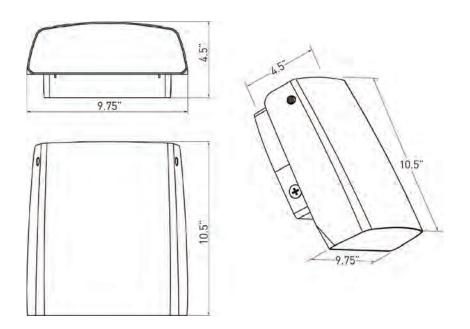

1 SPECIFICATIONS

		C.Pe	Katuli	Photo Cellulade Beat Andle Power Factor			life		
Power	Lunens	Color Tempe	Voltage	PhotoCe	Beam Angle	Power Factor	CRI	Average Life	Finish
WLP-A20-1400-4B									
20W	1400LM	4000 °K	100-277V	120V	90	>0.9	>80	50000H	Black
WLP-A30-2700-4B									
30W	2700LM	4000°K	100-277V	120V	90	>0.9	>80	50000H	Black
WLP-A70-5400-4B									
70W	5400LM	4000°K	100-277V	120V	90	>0.9	>80	50000H	Black
WLP-A100-70000-4B									
100W	7000LM	4000°K	100-277V	120V	90	>0.9	>80	50000H	Black

Consult your sales representative for additional color temperature and finish options. Motion sensor also available.















Tor more information and installation instructions, visit: EssentialElectrix.com





